


Model: PARMA LEATHER ANT.
Codes: 100322867
Group: G-222
Format: 30X30X0,85CM

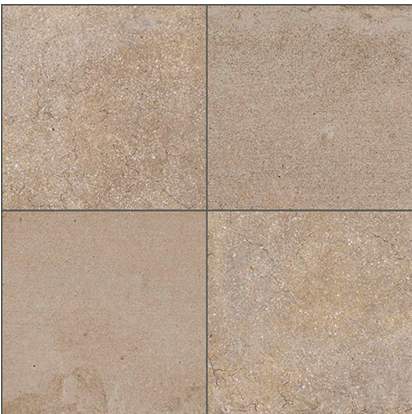

RECOMMENDATIONS		
Recommended adhesive	100004241 FR-ONE BLANCO N 25KG	
Recommended joint	100236808 COLORSTUK RAPID BEIGE N 5KG	
Recommended joint (wet area)	100236808 COLORSTUK RAPID BEIGE N 5KG	
Recommended adhesive (wet area)	100004241 FR-ONE BLANCO N 25KG	

DIMENSIONAL FEATURES		
Length and width deviation	±0.5%	UNE-EN ISO 10545-2*
Side straightness deviation	±0.5 %	UNE-EN ISO 10545-2*
Orthogonality deviation	±0.5%	UNE-EN ISO 10545-2*
Surface flatness deviation	±0.5 %	UNE-EN ISO 10545-2*

FEATURES	
 Gloss-free	 Material suitable for use on pool surroundings.
 Material suitable for use on shower walls.	 Material suitable for use on outdoor walls.
 Material suitable for use on indoor walls.	 Material suitable for use on permanently wet areas.
 Material suitable for use on shower floors.	 Material suitable for use on outdoor floors.
 Material recommended for installation on the floor.	

ADDITIONAL NOTES	
For swimming pools, follow the installation and maintenance instructions, as well as the instructions for the recommended SUPER FLEX S2 adhesive and EPOTECH AQUA grout. In these applications, it is necessary to waterproof the substrate, install a minimum joint of 5 mm, and install expansion joints.	



PHYSICAL PROPERTIES		
Water absorption	Bla	ISO 10545-3*
Breaking strength	>2100 N	>1300 N*
Resistance to thermal shock	PASS	ISO 10545-9*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1f I/A1	EN 13501-1*
Flexural strength	>51 MPA	ISO 10545-4*
Slip resistance (wet pendulum) irhd 55	CL 3 (63)	EN 16165 Anexo C*
Slip resistance (pendulum-dry)	110	
Dynamic coefficient of friction (dcof)	0.88	
Abrasion resistance	PEI 3	

CHEMICAL PROPERTIES		
Stain resistance	CL 5	ISO 10545-14*
Resistance to chemicals	GA/GLA/GHA	ISO 10545-13*

PACKING		
Sales units per box	0.99 M2/BOX	
Sales units per pallet	47.52 M2/PAL	
Sales units per unit	0.09 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Net weight	19.444444 KG/M2	
Gross weight	19.933333 KG/M2	

