


Model: BALI DENPASAR MATT
Codes: 100340696
Group: G-226
Format: 14,7X14,7X0,85CM

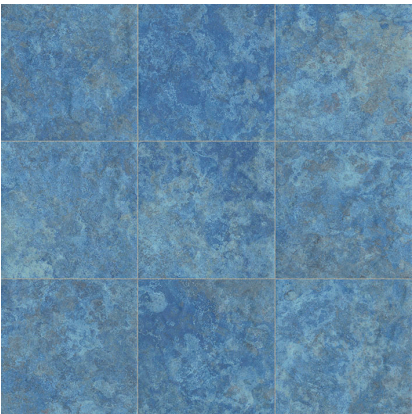

RECOMMENDATIONS

Recommended adhesive	100043280 TIXOCEM PLUS 25KG
Recommended joint	100236834 COLORSTUK RAPID GRIS N 5KG
Recommended joint (wet area)	100182208 EPOTECH AQUA GRIS 1,5KG
Recommended adhesive (wet area)	100043280 TIXOCEM PLUS 25KG

DIMENSIONAL FEATURES

Length and width deviation	±0.5%	UNE-EN ISO 10545-2*
Side straightness deviation	±0.5 %	UNE-EN ISO 10545-2*
Orthogonality deviation	±0.5%	UNE-EN ISO 10545-2*
Surface flatness deviation	±0.5 %	UNE-EN ISO 10545-2*

FEATURES

 Gloss-free	 Material suitable for use on pool surroundings.
 Material suitable for use on shower walls.	 Material suitable for use on outdoor walls.
 Material suitable for use on indoor walls.	 Material suitable for use on permanently wet areas.
 Material suitable for use on shower floors.	 Material suitable for use on outdoor floors.
 Material recommended for installation on the floor.	

PHYSICAL PROPERTIES

Water absorption	Bla	ISO 10545-3*
Breaking strength	>1800 N	>1300 N*
Resistance to thermal shock	PASS	ISO 10545-9*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1f I/A1	EN 13501-1*
Slip resistance (wet pendulum) irhd 55	CL 3 (49)	EN 16165 Anexo C*
Slip resistance (shod feet)	R10	EN 16165 Anexo B*
Slip resistance (pendulum-dry)	>40*	
Dynamic coefficient of friction (dcof)	0.70 (T3C1K)	
Abrasion resistance	PEI 4	ISO 10545-7*
Slip resistance (wet pendulum) (aus) irhd 55	58 (T3C1K)	
Slip resistance (wet pendulum) (aus) irhd 96	61 (T3C1K)	



CHEMICAL PROPERTIES		
Stain resistance	CL 5	ISO 10545-14*
Resistance to chemicals	GA/GLA/GHA	ISO 10545-13*

PACKING		
Sales units per box	0.302526 M2/BOX	
Sales units per pallet	54.454665 M2/PAL	
Sales units per unit	0.021609 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Net weight	19.436351 KG/M2	
Gross weight	19.852845 KG/M2	

