


Model: PARADISE TINYBROKEN EDGE NEGRO

Codes: 100112570

Group: G-110

Format: 31X31X0,8CM

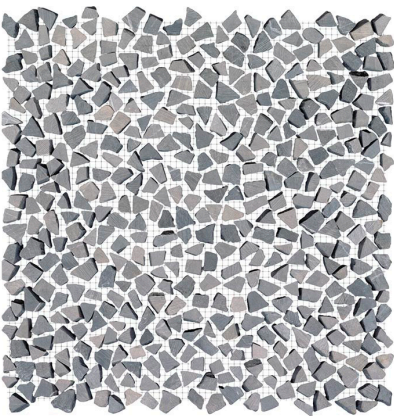

RECOMMENDATIONS		
Recommended adhesive	100201526 ONE-FLEX PREMIUM BLANCO 25KG	
Recommended joint	100236449 COLORSTUK RAPID CEMENTO N 5KG	
Recommended joint (wet area)	100236449 COLORSTUK RAPID CEMENTO N 5KG	100086920 FILA FOB XTREME 1L
Recommended adhesive (wet area)	100201526 ONE-FLEX PREMIUM BLANCO 25KG	

TECHNICAL INFORMATION		
Slip resistance (wet pendulum) irhd 55	CL 2 (38)	EN 16165 Anexo C*
Water absorption at atmospheric pressure	0.1-0.2%	UNE-EN 13755:2002*
Slip resistance (pendulum-dry)	78	
Flammability	Clase A1f I/Clase A1	UNE-EN 13501-1:2007+A1:2010*
Frost resistance	2.8 MPa	UNE-EN 12371:2011*
Resistance to abrasion	22 mm	UNE-EN 14157:2005*
Use	FLOOR TILES	
Flexural strength	3.4 MPa	UNE-EN 12372:2007*
Dynamic coefficient of friction (dcof)	0.51	ANSI 137.1*
Composition	BASALT	

FEATURES	
 Product manufactured on a mesh that makes installation easier.	 Gloss-free
 Material suitable for use on shower floors.	 Material suitable for use on pool surroundings.
 Material suitable for floors with substantial use (private setting in high-traffic rooms.)	 Material suitable for use on outdoor floors.
 Material suitable for use on indoor floors.	 Material suitable for use on shower walls.
 Material suitable for use on outdoor walls.	 Material suitable for use on indoor walls.



PACKING		
Sales units per square meter	10.405827 PIECES/M2	
Sales units per box	9 PIECES/BOX	
Sales units per unit	1 PIECES	
Sale unit	ST	
Base unit	ST	
Net weight	1.524 KG/PIECES	
Gross weight	1.592 KG/PIECES	

