


Model: PIGMENTS BLACK
Codes: 100370949
Group: G-226
Format: 14,7X29,7X0,85CM

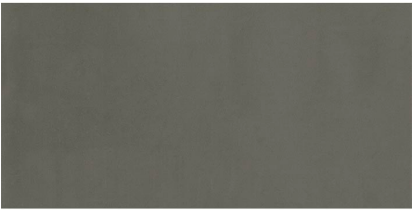

RECOMMENDATIONS		
Recommended adhesive	100043280 TIXOCEM PLUS 25KG	
Recommended joint	100236481 COLORSTUK RAPID ANTRACITA N 5KG	
Recommended joint (wet area)	100236481 COLORSTUK RAPID ANTRACITA N 5KG	
Recommended adhesive (wet area)	100043280 TIXOCEM PLUS 25KG	

FEATURES	
 Gloss-free	 Material suitable for use on shower walls.
 Material suitable for use on outdoor walls.	 Material suitable for use on indoor walls.
 Material suitable for use on indoor floors.	 Material recommended for installation on the floor.

DIMENSIONAL FEATURES		
Length and width deviation	±0.5%	UNE-EN ISO 10545-2*
Side straightness deviation	±0.5 %	UNE-EN ISO 10545-2*
Orthogonality deviation	±0.5%	UNE-EN ISO 10545-2*
Surface flatness deviation	±0.5 %	UNE-EN ISO 10545-2*

PHYSICAL PROPERTIES		
Water absorption	Bla	ISO 10545-3*
Breaking strength	2322.2 N	>1300 N*
Resistance to thermal shock	PASS	ISO 10545-9*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1f I/A1	EN 13501-1*
Flexural strength	>51 N/mm2	ISO 10545-4*
Slip resistance (wet pendulum) irhd 55	CLASE 1	UNE EN 16165*
Slip resistance (pendulum-dry)	>40*	
Dynamic coefficient of friction (dcof)	0.59 (T1C1K)	
Abrasion resistance	PEI 2	ISO 10545-7*
Slip resistance (wet pendulum) (aus) irhd 55	21 (T1C1K)	
Slip resistance (wet pendulum) (aus) irhd 96	37 (1C1K)	



PACKING		
Sales units per box	0.611226 M2/BOX	
Sales units per pallet	46.453174 M2/PAL	
Sales units per unit	0.043659 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Net weight	19.972973 KG/M2	
Gross weight	20.683022 KG/M2	

CHEMICAL PROPERTIES		
Stain resistance	CL 5	ISO 10545-14*
Resistance to chemicals	GA/GLA/GHA	ISO 10545-13*

