


Model: BALI KUTA MATT
Codes: 100340700
Group: G-226
Format: 14,7X14,7X0,85CM

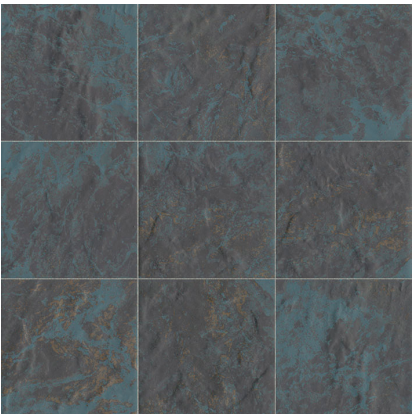

RECOMMENDATIONS		
Recommended adhesive	100043280 TIXOCEM PLUS 25KG	
Recommended joint	100236834 COLORSTUK RAPID GRIS N 5KG	
Recommended joint (wet area)	100182208 EPOTECH AQUA GRIS 1,5KG	
Recommended adhesive (wet area)	100043280 TIXOCEM PLUS 25KG	

DIMENSIONAL FEATURES		
Length and width deviation	±0.5%	UNE-EN ISO 10545-2*
Side straightness deviation	±0.5 %	UNE-EN ISO 10545-2*
Orthogonality deviation	±0.5%	UNE-EN ISO 10545-2*
Surface flatness deviation	±0.5 %	UNE-EN ISO 10545-2*

FEATURES	
 Gloss-free	 Material suitable for use on pool surroundings.
 Material suitable for use on shower walls.	 Material suitable for use on outdoor walls.
 Material suitable for use on indoor walls.	 Material suitable for use on permanently wet areas.
 Material suitable for use on shower floors.	 Material suitable for use on outdoor floors.
 Material recommended for installation on the floor.	

ADDITIONAL NOTES	
For swimming pools, follow the installation and maintenance instructions, as well as the instructions for the recommended SUPER FLEX S2 adhesive and EPOTECH AQUA grout. In these applications, it is necessary to waterproof the substrate, install a minimum joint of 5 mm, and install expansion joints.	



PHYSICAL PROPERTIES		
Water absorption	Bla	ISO 10545-3*
Breaking strength	>1800 N	>1300 N*
Resistance to thermal shock	PASS	ISO 10545-9*
Crack resistance	PASS	ISO 10545-11*
Flammability	A1f I/A1	EN 13501-1*
Slip resistance (wet pendulum) irhd 55	CL 3 (49)	EN 16165 Anexo C*
Slip resistance (shod feet)	R10	EN 16165 Anexo B*
Slip resistance (pendulum-dry)	98	
Dynamic coefficient of friction (dcof)	0.78 (T7C1K)	
Abrasion resistance	PEI 3	ISO 10545-7*
Slip resistance (wet pendulum) (aus) irhd 55	P5	AS 4586*
Slip resistance (wet pendulum) (aus) irhd 96	P4	AS 4586*

CHEMICAL PROPERTIES		
Stain resistance	CL 5	ISO 10545-14*
Resistance to chemicals	GA/GLA/GHA	ISO 10545-13*

PACKING		
Sales units per box	0.302526 M2/BOX	
Sales units per pallet	54.454665 M2/PAL	
Sales units per unit	0.021609 M2/PIECE	
Sale unit	M2	
Base unit	ST	
Net weight	19.852845 KG/M2	
Gross weight	20.269338 KG/M2	



It is advisable to follow the installation and maintenance instructions published by L'ANTIC COLONIAL, S.A., observing in any case the legal or regulatory requirements that may exist for each area of use. Do not use cleaning agents containing hydrofluoric acid. In public places the tiles must comply with the slipperiness requirements of the Spanish Technical Building Code. This document is purely commercial and may not be used in any legal or administrative proceedings, neither as an expert opinion nor as documentary evidence, unless expressly authorized by L'ANTIC COLONIAL, S.A.