


Model: METROPOLITAN SEAGREEN  
Codes: 100336779  
Group: G-226  
Format: 20X20CM

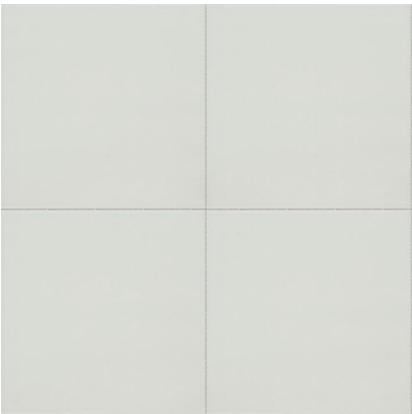

| RECOMMENDATIONS                 |                                      |  |
|---------------------------------|--------------------------------------|--|
| Recommended adhesive            | 100043280 TIXOCEM PLUS 25KG          |  |
| Recommended joint               | 100236834 COLORSTUK RAPID GRIS N 5KG |  |
| Recommended joint (wet area)    | 100236834 COLORSTUK RAPID GRIS N 5KG |  |
| Recommended adhesive (wet area) | 100043280 TIXOCEM PLUS 25KG          |  |

| DIMENSIONAL FEATURES        |        |                     |
|-----------------------------|--------|---------------------|
| Length and width deviation  | ±0.5%  | UNE-EN ISO 10545-2* |
| Side straightness deviation | ±0.3 % | UNE-EN ISO 10545-2* |
| Orthogonality deviation     | ±0.5%  | UNE-EN ISO 10545-2* |
| Surface flatness deviation  | ±0.5 % | UNE-EN ISO 10545-2* |

| FEATURES                                                                                                                                           |                                                                                                                                     |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--|
|  Material with surface with the ability to produce reflections. |  Material suitable for use on shower walls.      |  |
|  Material suitable for use on indoor walls.                     |  Material recommended for installation on walls. |  |

| PHYSICAL PROPERTIES |         |               |
|---------------------|---------|---------------|
| Water absorption    | BIII    | ISO 10545-2*  |
| Breaking strength   | >900 N  | >600 N*       |
| Crack resistance    | PASS    | ISO 10545-11* |
| Flammability        | A1      | EN 13501-1*   |
| Flexural strength   | >20 MPA | ISO 10545-4*  |

| CHEMICAL PROPERTIES     |            |               |
|-------------------------|------------|---------------|
| Stain resistance        | Clase 5    | ISO 10545-14* |
| Resistance to chemicals | GA/GLA/GHA | ISO 10545-13* |

| PACKING                |               |  |
|------------------------|---------------|--|
| Sales units per box    | 0.88 M2/BOX   |  |
| Sales units per pallet | 52.8 M2/PAL   |  |
| Sales units per unit   | 0.04 M2/PIECE |  |
| Sale unit              | M2            |  |
| Base unit              | ST            |  |
| Net weight             | 15.125 KG/M2  |  |
| Gross weight           | 15.65 KG/M2   |  |

